

TYPICAL APPLICATION:
**DAYTIME MAINTENANCE OPERATIONS
 OF SHORT DURATION ON A TWO-LANE
 ROADWAY—FLAGGING IS PROVIDED**



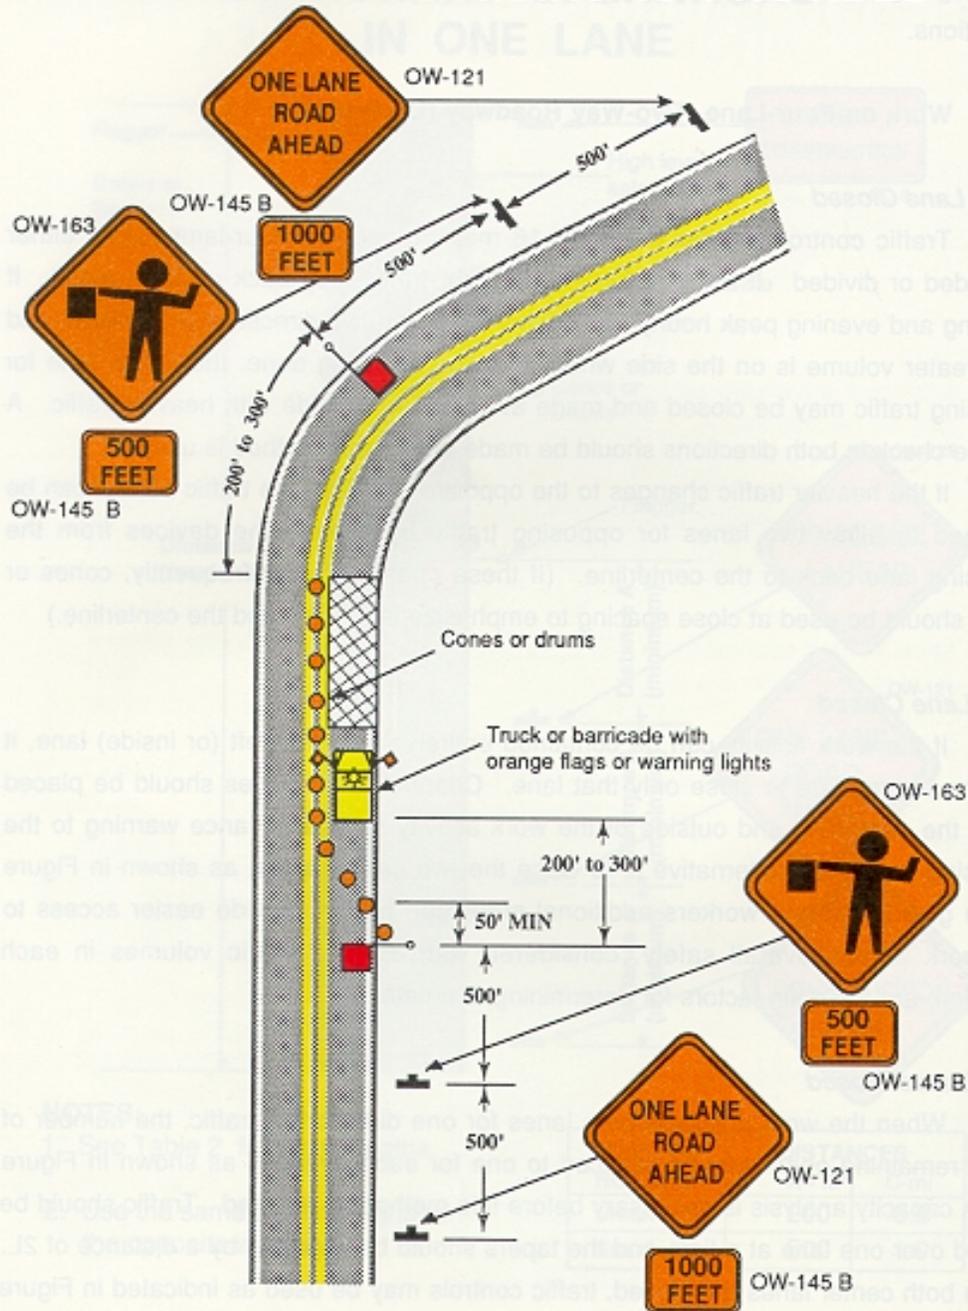


Figure 14

TYPICAL APPLICATION OF
TRAFFIC CONTROL DEVICES
FOR
OPERATIONS NEAR
THE CREST OF A HILL

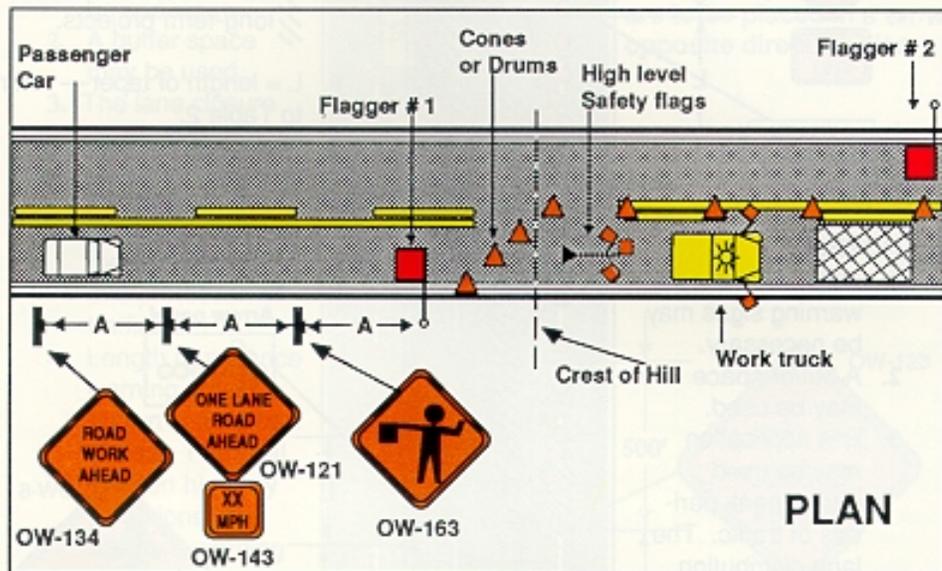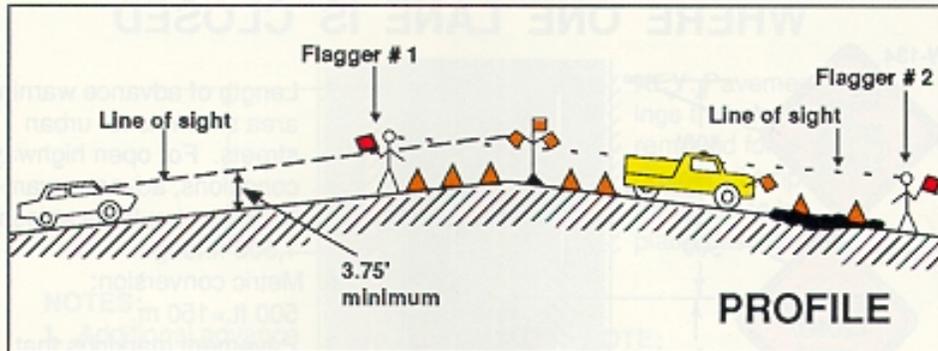

NOTES:

1. Flaggers must be visible to each other.
2. High level safety flags must be visible to motorist ascending the hill.
3. Flagger # 1 and at least part of the taper must be located in advance of the hill crest.

A = 200' Urban
500' Std.

Figure 15

**TYPICAL APPLICATION OF
TRAFFIC CONTROL DEVICES FOR
DAYTIME MAINTENANCE OPERATIONS
OF SHORT DURATION ON A
FOUR-LANE UNDIVIDED ROADWAY
WHERE ONE LANE IS CLOSED**

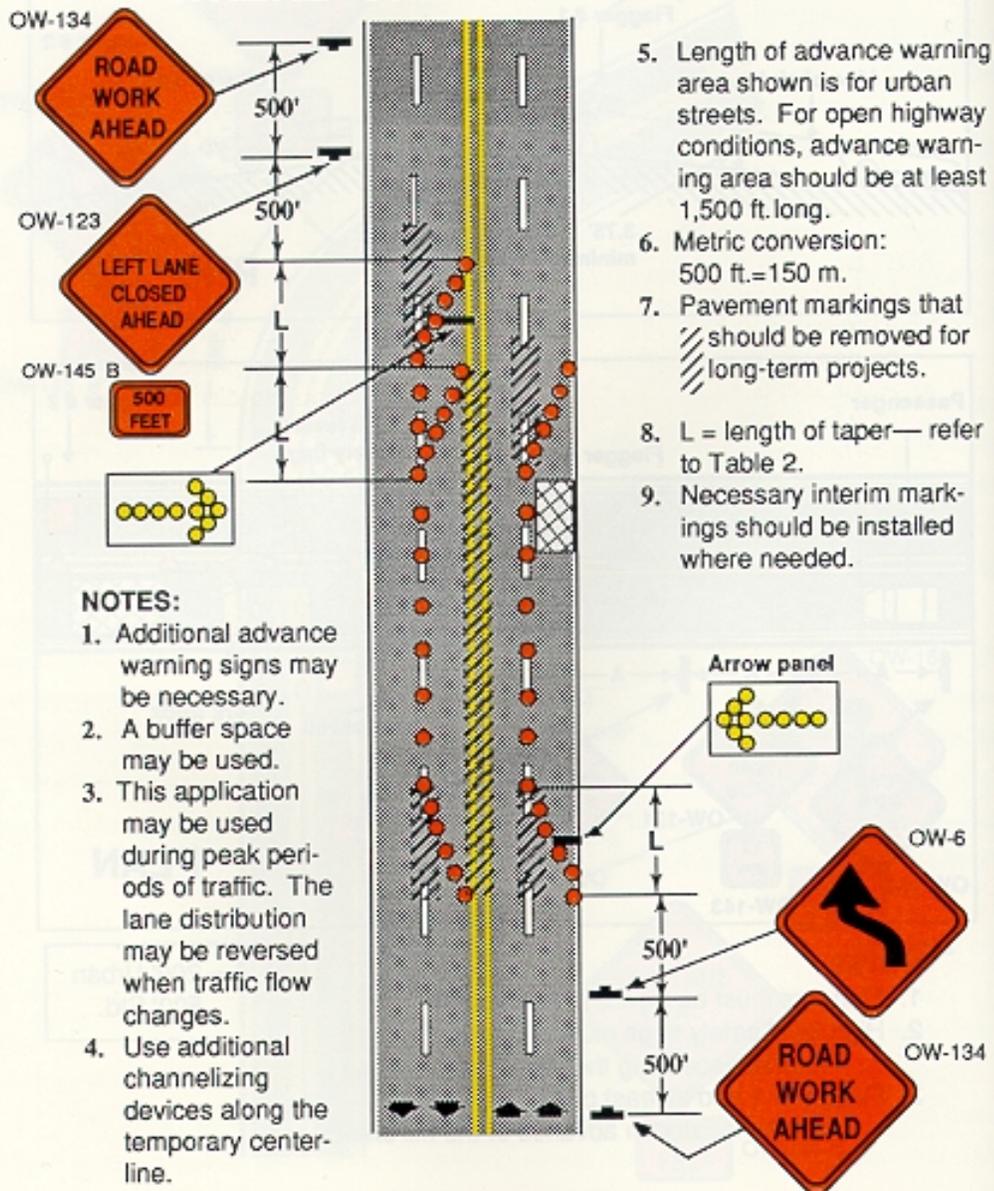


Figure 16